





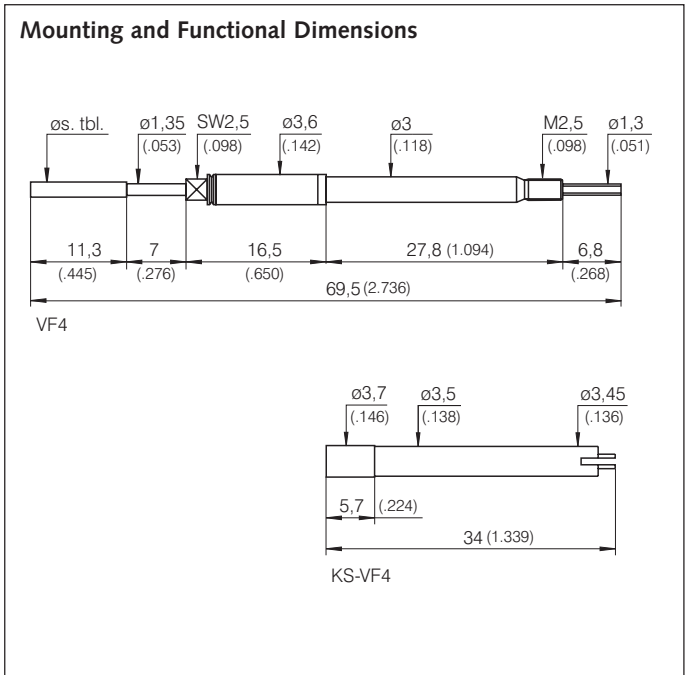


Available Tip Styles					
Material	Tip Style	Standard Plating	Special Versions		
			Ø	(Ø inch)	
2	21* 	A			
2	23* 	A			
2	06 	A	4.00	(.157)	
2	03 	A	4.00	(.157)	
2	02 	A			
2	02 	A			



Mechanical Data

Working Stroke: 5,0 mm (.197)
 Maximum Stroke: 7,0 mm (.276)
 Spring Force at Work. Stroke: 15 N (54 oz.)
 alternative: 20 N (72 oz.)

Installation Height

Installation Height with KS: 40,5 mm (1.594)

Electrical Data


Current Rating: 8 A
 R_i typical: < 30 mΩ

Mounting Hole Size

in CEM 1 and FR 4: 3,5 mm (.1378)

Materials


Barrel: Brass, gold-plated
 Spring: Steel, gold-plated
 Plunger: Steel, gold-plated
 Receptacle: Brass, gold-plated

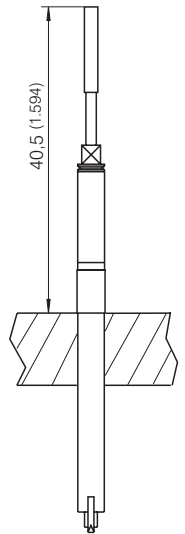

Note to VF 4 and KS - VF 4
 VF 4 are screwed into KS-VF 4 using special tools
 > see page 103.
 Recommended Screw-in Torque: Maximum 20 Ncm

***Note:**
 The flat surface on the Plunger Tip is in the same alignment as the flat surface on the rear of the Plunger.

Ordering Example:

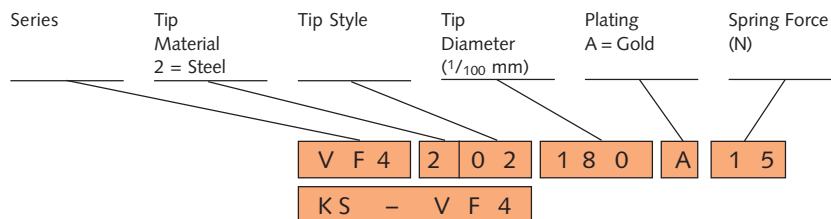

Test Probe:
 Receptacle: