


Screw-in Tools with a system

With the use of torque screwing tools it is ensured that the recommended screw-in torque is heeded. Both infinitely-variable as well as fixed-adjustable Torque Screwing Tools are available.

The 1/4"-Bit plug-in system guarantees a high level of flexibility, i.e. all Screw-in Tools can be combined with the various Torque Screwing Tools.

Naturally, the Bit-Tools can also be used without Torque Screwing Tools, e.g. for de-assembly when no space limitation exists.

Series	Plunger Tip-Ø	Bit-Tool	Ø A [mm]	Ø B [mm]	C [mm]	Torque key pre-set	Torque key freely adjustable		Torque	Insertion Tools for Receptacle
GKS-050 M	≤ 1,1 mm	BIT-GKS-050 M-B	1,5	5	30	DW-1			1 Ncm	SW-KS-080
GKS-075 M	≤ 1,1 mm	BIT-GKS-075 M-B	2,3	5	30	DW-1			1 Ncm	SW-KS-075 G
GKS-075 M	≤ 1,5 mm	BIT-GKS-075 M	2,3	5	30	DW-1			1 Ncm	SW-KS-075 G
GKS-087 M	≤ 1,1 mm	BIT-GKS-050 M-B	1,5	5	30	DW-1			1 Ncm	SW-KS-050 G
GKS-103 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-103
GKS-103 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-103
GKS-112 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40		5 Ncm	SW-KS-112
GKS-112 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40		5 Ncm	SW-KS-112
GKS-113 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
GKS-113 M	≤ 4,2 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
GKS-204 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40		5 Ncm	SW-KS-112
GKS-503 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-103
GKS-503 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-103
GKS-803 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-103
GKS-803 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-103
GKS-913 M	≤ 3,0 mm	BIT-GKS-913 M-B	4,8	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
GKS-913 M	≤ 4,2 mm	BIT-GKS-913 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
HSS-118 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40		5 Ncm	SW-KS-112
HSS-118 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40		5 Ncm	SW-KS-112
HSS-120 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
HSS-120 M	≤ 4,2 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
HSS-150 M	≤ 4,2 mm	BIT-HSS-150 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-GKS
PKS-355 M	≤ 2,5 mm	BIT-SKS-465 M-B	4	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
PSK-350 M	≤ 2,5 mm	BIT-SKS-465 M-B	4	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
SKS-215 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40		5 Ncm	SW-KS-112
SKS-215 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40		5 Ncm	SW-KS-112
SKS-435 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-103
SKS-435 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-103
SKS-465 M	≤ 2,5 mm	BIT-SKS-465 M-B	4	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
SKS-465 M	≤ 3,0 mm	BIT-SKS-465 M	4	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
T-112 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40		5 Ncm	SW-KS-112
T-113 M	≤ 5,0 mm	BIT-T-113 M	6	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-113
VF-4	≤ 2,5 mm	BIT-SKS-465 M-B	4	-	-	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-103
VF-4	≤ 3,0 mm	BIT-SKS-465 M	4	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	SW-KS-103
VF-5	≤ 3,0 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	20 Ncm	

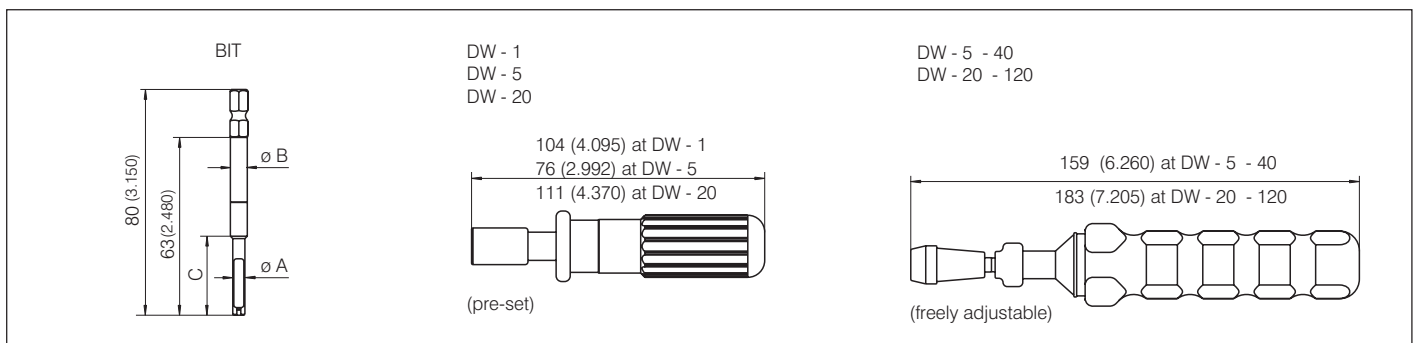

Ordering Example:

Bit-Tool for screw-in Probe:

BIT - GKS - 112 M - B

Torque keys pre-set:

DW - 1 DW - 5 DW - 20

Torque keys freely adjustable:

DW - 5 - 40 DW - 20 - 120